





Control Options - Grille Mounted

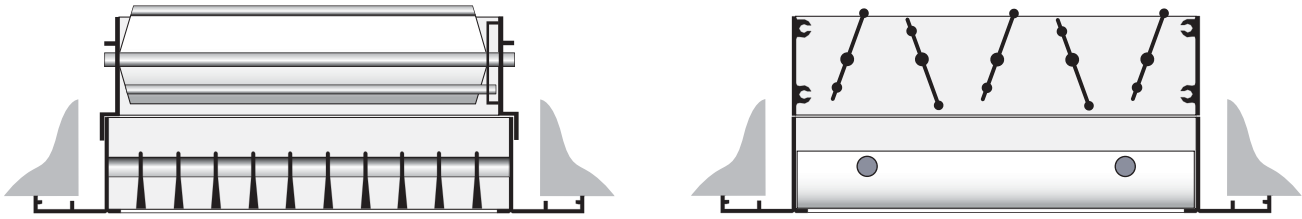

OBSS - Opposed Blade Damper
(Volume Control Damper- Capable of Shut Off)

Correction for Grille + Damper

Supply 0° spread	NR + 2	Ps x 1.3
Supply 45° spread	NR + 2	Ps x 1.1
Exhaust	NR + 2	Ps x 1.2

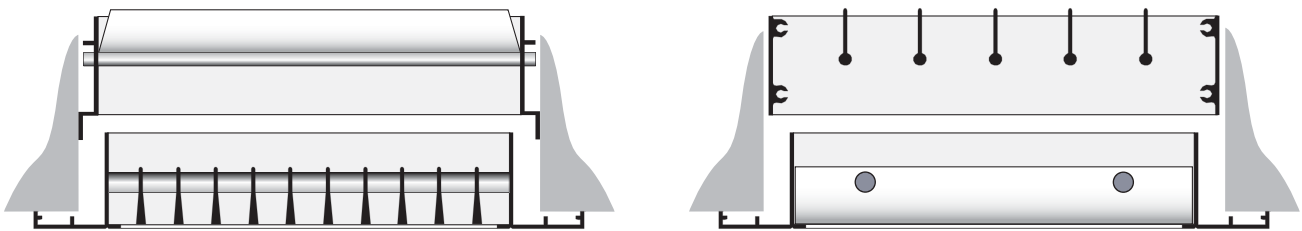

ED - Equalising Deflector
(Directional Blades Incapable of Shut Off)

DT-2M - Duct Fitted

The hinged strip is used to calibrate the amount of air desired, by altering the angle of the blades and therefore altering the amount of disruption to the airflow.

